


Walraven RapidStrut® Klizna navojnica G2

(H 24 04)

za brzo i jednostavnu montažu na profilnu šinu Strut

(BUP1000)

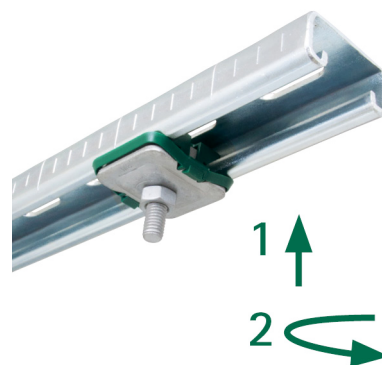



Prednosti i osobine

- klizna navojnica sa podloškom i BIS RapidStrut® fleksibilnim prstenom
- komplet predmontiran dodatak za jednostavniju i bržu montažu
- materijal: metalni dijelovi čelik 1.0332; fleksibilni prsten POM (polyoximethilen), zelena boja
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnu upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227



Art.br.	G	s (mm)	T _{inst} (Nm)	Za šina	F _{a,z} (N)	F _{a,x} (N)	KK	VP
665185106	M6	5,0	7	Strut	2.660	950	20	200
665185108	M8	6,0	11	Strut	3.120	1.100	20	200
665185110	M10	8,0	15	Strut	5.000	1.250	20	200
665185112	M12	9,0	22	Strut	5.000	2.440	20	200

M12 testirane na vatrootpornost prema EN 1366-1.
M10 testirane na vatrootpornost prema EN 1366-1.
Tested values in combination with BIS RapidStrut® Rail 41x41x2,5mm.
More details can be found on the Technical Datasheet.

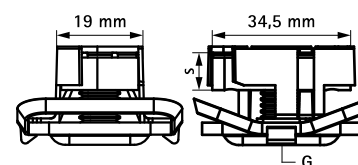

Kompetabilno

Walraven RapidStrut® Profilna šina DS 5
(BUP1000)
Walraven RapidStrut® Konzole (BUP1000)