

Walraven Strut Connector 90° / 2D (BUP1000)

(H 28 23)

konstrukcije sa profilnim šinama Strut





6659 8 914




6659 8 918

Prednosti i osobine


- flexible connector allows different rail positioning
- strong connection by surrounding the rail
- materijal: čelik 1.0332
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnju upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227

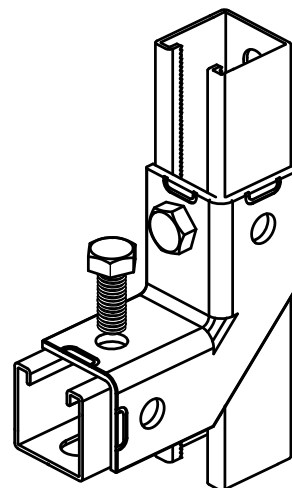

Art.br.	d (mm)	Model	L	B (mm)	B2 (mm)	H (mm)	s (mm)	k (mm)	a (°)	Za šina	KK
66598914	13 mm	2+2 / 90	105 mm	105	45	45	4,0	-	90	Strut	10
66598918	13 mm	4+4 / 90	154 mm	154	45	45	4,0	49	90	Strut	10

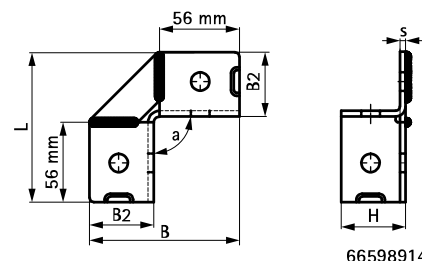

66598914

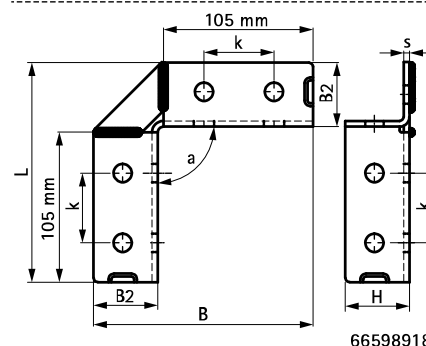

66598918

Kompetabilno

Walraven RapidStrut® Montažna šina (BUP1000)
Walraven RapidStrut® Profilna šina DS 5 (BUP1000)
Walraven Strut Klizne Navojnice

Kompetabilno

BIS Hexagon Head Bolts (BUP1000)