

Walraven Strut Klizne Navojnice (BUP1000)

(H 24 15)

za montažu na profilne šine Strut




Prednosti i osobine

- za sve modele Strut šine
- za utegnutu montažu dodataka (konektora) na profilnu šinu
- materijal: čelik 1.0332
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnu upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- testirano na vatrootpornost, test raport po upitu

Art.br.	G	s (mm)	T _(inst.) (Nm)	Za šina	F _{a,z} (N)	F _{a,x} (N)	KK	VP
65188006	M6	5,0	7,0	Strut	2.660	950	100	-
65188008	M8	6,0	25,0	Strut	4.500	2.200	100	1.000
65188010	M10	9,0	40,0	Strut	5.000	2.550	100	500
65188012	M12	9,0	50,0	Strut	5.000	2.950	100	500

*M10 testirane na vatrootpornost prema EN 1363-1.
 M12 testirane na vatrootpornost prema EN 1363-1.
 Tested values in combination with BIS RapidStrut® Rail 41x41x2,5mm.
 More details can be found on the Technical Datasheet.*

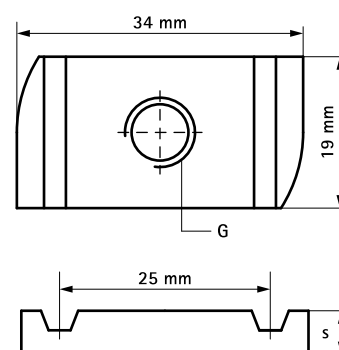

Kompetabilno

Walraven RapidStrut® Konzole (BUP1000)
 Walraven RapidStrut® Profilna šina DS 5
 (BUP1000)

Alternativa

Walraven RapidStrut® Leptirasta klizna
 navojnica (BUP1000)