


Walraven VibraTek® MS-1X Spring Mount

high performance spring isolator for medium to heavy equipment

(L2 05 09)

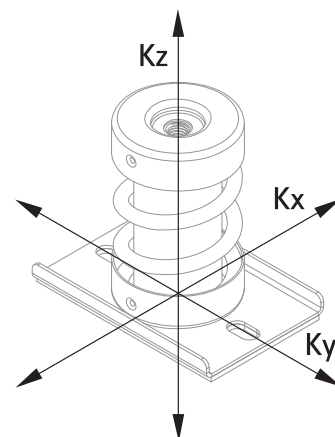

Prednosti i osobine

- recommended for equipment with low working speeds, from 600 rpm and above
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- Technical Data
 - average ratio $K_x / K_z = K_y / K_z = 0.7$
- working temperature range -90 °C till 150 °C

Art.br.	G	L	B	b3	H	d1	k	Min. Load	Max. Load	Min. Optim al Load	Max. Optim al Load	Max. Deflec tion	KK
			(mm)	(mm)	(mm)	(mm)	(mm)	(N)	(N)	(N)	(N)	(mm)	
2800401250	M12	86 mm	128	69	116	20 x 11	96	130	1.250	250	1.150	25,0	20
2800401500	M12	86 mm	128	69	116	20 x 11	96	150	1.500	300	1.380	25,0	20
2800402000	M12	86 mm	128	69	116	20 x 11	96	200	2.000	400	1.840	25,0	20
2800403000	M12	86 mm	128	69	116	20 x 11	96	300	3.000	600	2.760	25,0	20
2800404000	M12	86 mm	128	69	116	20 x 11	96	400	4.000	800	3.680	25,0	20
2800405000	M12	86 mm	128	69	116	20 x 11	96	500	5.000	1.000	4.600	25,0	20
2800406000	M12	86 mm	128	69	116	20 x 11	96	600	6.000	1.200	5.520	25,0	20

See Product Data Sheet for further technical information.

