


Walraven VibraTek® MS-2X Spring Mount

high performance spring isolator for heavy equipment

(L2 05 12)

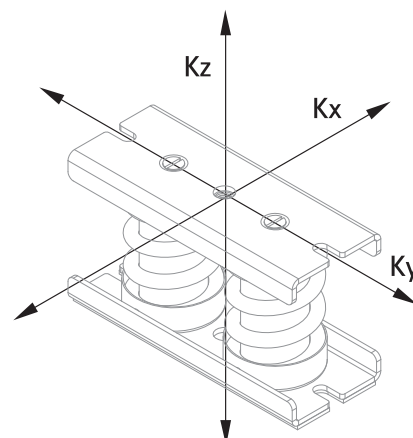

Prednosti i osobine

- recommended for equipment with low working speeds, from 600 rpm and above
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- Technical Data
 - ratio $K_x / K_z = 0.98$
 - ratio $K_y / K_z = 1.4$
- working temperature range -90 °C till 150 °C

Art.br.	G	L	B	H	d1	d2	Min. Load	Max. Load	Min. Optimal Load	Max. Optimal Load	Max. Deflection	KK
			(mm)	(mm)	(mm)	(mm)	(N)	(N)	(N)	(N)	(mm)	
2802003000	M12	83 mm	210	122	11	20	300	3.000	600	2.760	25,0	5
2802004000	M12	83 mm	210	122	11	20	400	4.000	800	3.680	25,0	5
2802006000	M12	83 mm	210	122	11	20	600	6.000	1.200	5.520	25,0	5
2802008000	M12	83 mm	210	122	11	20	800	8.000	1.600	7.360	25,0	5
2802010000	M12	83 mm	210	122	11	20	1.000	10.000	2.000	9.200	25,0	5
2802012000	M12	83 mm	210	122	11	20	1.200	12.000	2.400	11.040	25,0	5

See Product Data Sheet for further technical information.

