


Walraven VibraTek® MS-4 Spring Mount

(L2 05 15)

high performance spring isolator for medium to heavy equipment

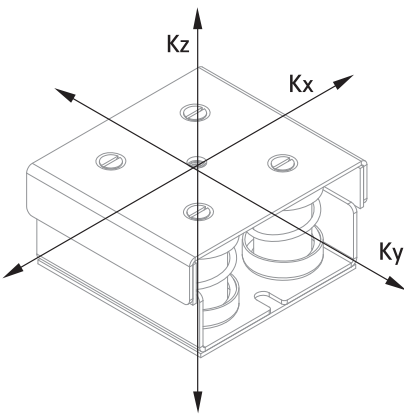

Prednosti i osobine

- recommended for equipment with low working speeds, from 600 rpm and above
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- Technical Data
  - average ratio  $K_x / K_z = K_y / K_z = 2.0$
- working temperature range -90 °C till 150 °C

| Art.br.    | G   | L      | B    | b3   | H    | Min. Load | Max. Load | Min. Optimal Load | Max. Optimal Load | Max. Deflection | KK |
|------------|-----|--------|------|------|------|-----------|-----------|-------------------|-------------------|-----------------|----|
|            |     |        | (mm) | (mm) | (mm) | (N)       | (N)       | (N)               | (N)               | (mm)            |    |
| 2800501000 | M10 | 145 mm | 158  | 140  | 80   | 100       | 1.000     | 200               | 900               | 23,0            | 5  |
| 2800501500 | M10 | 145 mm | 158  | 140  | 80   | 130       | 1.500     | 260               | 1.350             | 23,0            | 5  |
| 2800502000 | M10 | 145 mm | 158  | 140  | 80   | 200       | 2.000     | 400               | 1.800             | 23,0            | 5  |
| 2800503000 | M10 | 145 mm | 158  | 140  | 80   | 300       | 3.000     | 700               | 2.700             | 23,0            | 5  |
| 2800504000 | M10 | 145 mm | 158  | 140  | 80   | 400       | 4.000     | 800               | 3.600             | 23,0            | 5  |
| 2800505000 | M10 | 145 mm | 158  | 140  | 80   | 500       | 5.000     | 1.000             | 4.500             | 23,0            | 5  |

See Product Data Sheet for further technical information.

