


Walraven VibraTek® MS-M Spring Mount

compact spring isolator for light equipment

(L2 05 03)

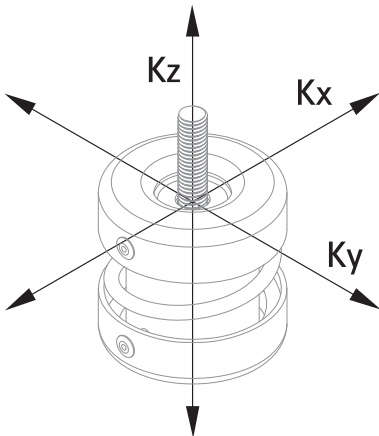

Prednosti i osobine

- low-rise spring isolator with M8 external thread for light equipment or tight spaces
- recommended for machinery with working speeds above 1000 rpm
- steel frame attached to spring mechanically with metal rivets
- Technical Data
 - average ratio $K_x / K_z = K_y / K_z = 1.3$
- working temperature range -90 °C till 150 °C

Art.br.	B	H	h	G1	G2	Lm1	Min. Load	Max. Load	Min. Optimal Load	Max. Optimal Load	Max. Deflection	KK
	(mm)	(mm)	(mm)			(mm)	(N)	(N)	(N)	(N)	(mm)	
2800200150	Ø 51	73	50,5	M8	M8	22,5	25	150	30	140	12,0	50
2800200250	Ø 51	73	50,5	M8	M8	22,5	40	250	50	230	12,0	50
2800200500	Ø 51	73	50,5	M8	M8	22,5	80	500	100	450	12,0	50
2800200750	Ø 51	73	50,5	M8	M8	22,5	125	750	150	680	12,0	50
2800201000	Ø 51	73	50,5	M8	M8	22,5	125	1.000	200	980	12,0	50

See Product Data Sheet for further technical information.

