


Walraven Yeti® 130 Frame Set

for Light Rooftop Installations

(1 04 52)

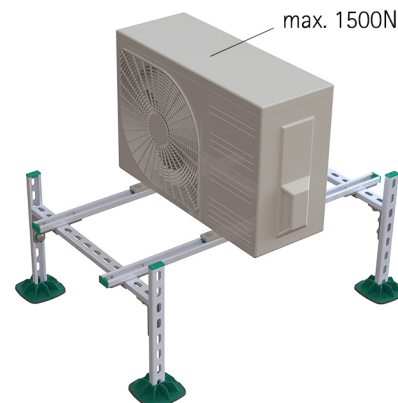


Prednosti i osobine

- kompletan set za podršku instalacijama na ravnim krovovima
- pogodan za razne vrste klima uređaja, ventilacionih sistema, itd.
- sa anti kliznim, vibracionim matom
- predefined load capacity (max. 1,500 N), calculation not necessary
- vrh uređaja ne sme biti viši od 1,2 metara od nivoa krova
- lajsne su napravljene od WPC materijala. WPC je kompozit od reciklirane plastike i drvenih vlakana
- plastic components made from 100% recycled material
- otporan na UV zračenje i hemijskih uticaja
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnu upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- sound reduction
- Part No. 67685532 consisting of:
 - 4 x BIS Yeti® 130 including non-slip anti-vibration mat (made of rubber)
 - 2 x 1.0 m BIS RapidStrut® Fixing Rail 41x21 (BUP1000), cut to length and deburred
 - 2 x 0.6 m BIS RapidStrut® Fixing Rail 41x21 (BUP1000), cut to length and deburred
 - 4 x 0.4 m BIS RapidStrut® Fixing Rail 41x21 (BUP1000), cut to length and deburred, as vertical legs, ready to just plug in the BIS Yeti® 130
 - all connecting elements, rail end caps and bolts are included and most are pre-assembled



ITB No.
LZM00-02259

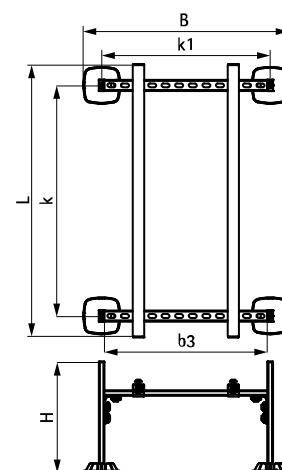

Art.br.	Model	L	B	b3	H	k	k1	F _{a,z}	KK
67685532	BIS Yeti® 130 Frame Set for 1 installation appliance	1.000 mm	751 (mm)	600 (mm)	400 (mm)	850 (mm)	621 (mm)	1.500 (N)	1

Maksimalno opterećenje (F_{a,z}) zavisi od nosivosti trapeznog krova. Pre montaže, nosivost krova mora biti potvrđena od strane ovlašćenog inženjera.
Ako je potrebna promena u konstrukciji seta, molimo vas da se obratite tehničkoj službi firme Walraven.

Alternativa

Walraven Yeti® 335 Šinski Set