



## In-Wall Strut WMO

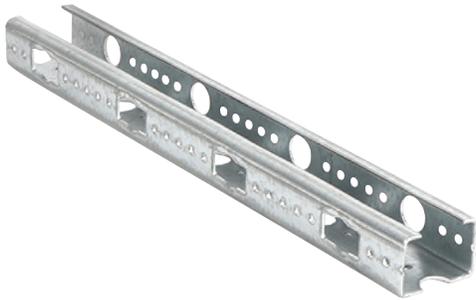

### Product Specifications

- Once hung or mounted, this is used to support vertical or horizontal piping with attachments
- Channel side fits RapidRail®, starQuick® and stub-out accessories
- Pre-punched holes fit 3/8" threaded rod and angled wall bracket accessories
- Pre-drilled holes allow for secure mounting of starQuick®, Rabbit clamp and BISMAT® clamps using a Quick Hanger Bolt
- Material: pre-galvanized steel 1.0226

Item number	Length (inches)	Items per pkg.
650509008	8	25
650509012	12	25
650509018	18	25
650509022	22	25
650509032	32	25
650509000	7 ft.	1

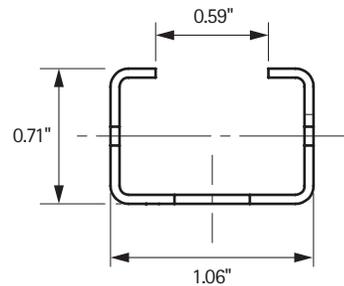

<b>PRODUCT SUBMITTAL</b>		Date:	Architect / Owner:
Job Name:			
		Contractor:	
Part No.	Qty:	Notes:	

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC.

