


BIS Śruby z łbem sześciokątnym STN


(M 80 05)

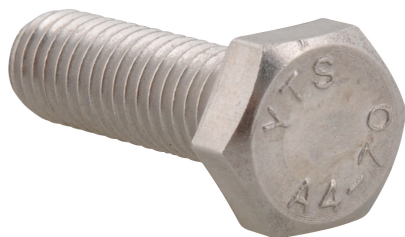

Zalety i właściwości

- materiał: stal nierdzewna 1.4401 (AISI 316)

Nr kat.	Typ	G	L	s (mm)	Lm1 (mm)	SW1 (mm)	Pud.
6147825	DIN 933	M8	30 mm	5,0	25	13	100
6147840	DIN 933	M8	45 mm	5,0	40	13	100
6147860	DIN 933	M8	65 mm	5,0	60	13	100
6148025	DIN 933	M10	29 mm	4,0	25	17	100
6148040	DIN 933	M10	45 mm	5,0	40	17	100
6148060	DIN 933	M10	65 mm	5,0	60	17	50
6148225	DIN 933	M12	29 mm	4,0	25	19	50
6148240	DIN 933	M12	45 mm	5,0	40	19	100

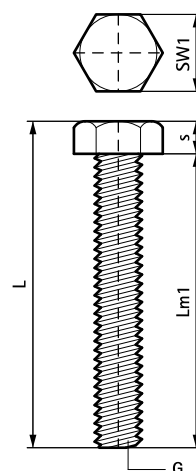

Uzupełnienie

BIS Podkładki płaskie do szyn
montażowych STN
BIS Nakrętki sześciokątne STN