

# BIS Śruby dwugwintowe z kołnierzem

(K 40 10)

mocowanie do ścian lub stropów

985




## Zalety i właściwości

■ materiał: stal

■ ocynkowane elektrolitycznie

| Nr kat. | G   | L     | Lh<br>(mm) | Lm1<br>(mm) | PØ<br>(mm) | Pud. | Kart. |
|---------|-----|-------|------------|-------------|------------|------|-------|
| 6353635 | M6  | 35 mm | 25         | 8           | 8          | 100  | 2 000 |
| 6353650 | M6  | 50 mm | 30         | 6           | 8          | 100  | 1 000 |
| 6353680 | M6  | 80 mm | 50         | 6           | 8          | 100  | 500   |
| 6353780 | M7B | 80 mm | 40         | 5           | 8          | 100  | 1 000 |
| 6353850 | M8  | 50 mm | 30         | 8           | 10         | 100  | -     |
| 6353860 | M8  | 60 mm | 30         | 8           | 10         | 100  | 1 000 |
| 6353880 | M8  | 80 mm | 30         | 8           | 10         | 100  | -     |
| 6353890 | M8  | 90 mm | 50         | 12          | 10         | 100  | 500   |

M7B: pitch = M7 x 1 mm.

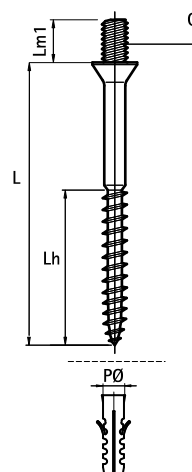

## Uzupełnienie

BIS Dyble stalowe do betonu