
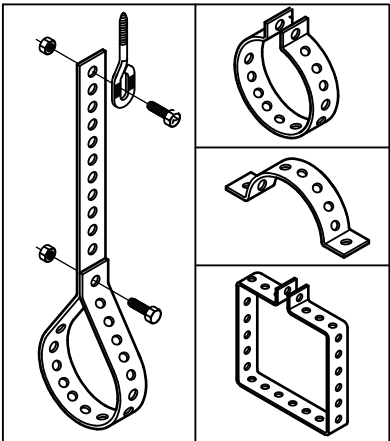


BIS Benzi zincate

(K 05 05)


fixarea țevelor și a conductelor de ventilație

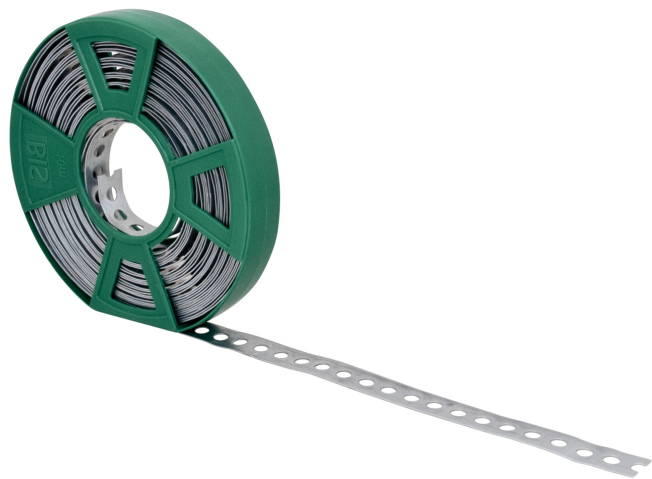

Caracteristici și beneficii

- cu perforare continuă
- material: oțel
- pregalvanizat

Art.Nr.	Tip	L	b x s (mm)	d1 (mm)	k (mm)	F _{a,z} (N)	Amb. 1	U.M.
0830012	5055	10 m	12 x 1,0	5,0	8,0	1.050	10	St.
0830117	5055	10 m	17 x 1,0	6,5	15,0	1.290	10	St.
0831012	5055L	10 m	12 x 0,8	5,0	8,0	840	10	St.
0831017	5055L	10 m	17 x 0,8	7,0	12,0	1.070	10	St.
0831026	5055L	10 m	26 x 1,0	8,5	14,0	2.620	1	St.

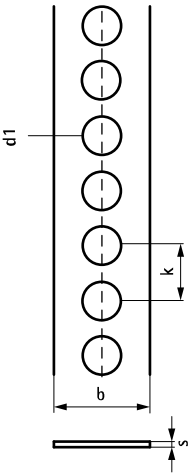

În combinație cu
BIS Ochi de suspendare (int)
BIS Cuie pentru beton
BIS Ochi de suspendare (metric)