

BISOFIX® E25 + HD500

12,0 - 219,1 mm

(D 03 32)


**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
- tehnologie BIS UltraProtect® 1000
- un singur sistem pentru aplicații interioare și exterioare
- rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
- temperature range -45 °C - +105 °C

BISOFIX® E25 + HD500

12,0 - 219,1 mm

(D 03 32)

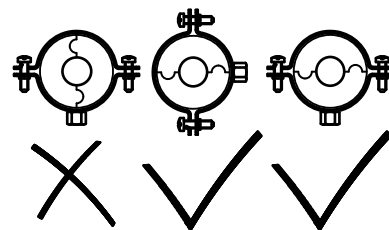

I253304076	I250000076 + 33048140	76,1	Clamp BISOFIX® E25 + HD500	575	25
I253304089	I250000089 + 33048154	88,9	Clamp BISOFIX® E25 + HD500	875	15
I253304102	I250000102 + 33048169	101,6	Clamp BISOFIX® E25 + HD500	1.000	15
I253304108	I250000108 + 33048183	108,0	Clamp BISOFIX® E25 + HD500	1.075	5
I253304114	I250000114 + 33048183	114,3	Clamp BISOFIX® E25 + HD500	1.250	5
I253304133	I250000133 + 33048202	133,0	Clamp BISOFIX® E25 + HD500	1.475	5
I253304140	I250000140 + 33048202	139,7	Clamp BISOFIX® E25 + HD500	1.700	5
I253304160	I250000160 + 33048227	159,0 - 160,0	Clamp BISOFIX® E25 + HD500	1.950	5
I253304168	I250000168 + 33068241	168,3	Clamp BISOFIX® E25 + HD500	2.125	3
I253304219	I250000219 + 33068289	219,1	Clamp BISOFIX® E25 + HD500	3.525	3