


BISOFIX[®] E32 + 2S

12,0 - 140,0 mm

(D 03 40)

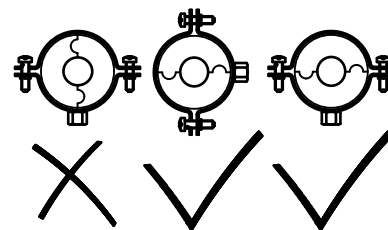

Caracteristici și beneficii

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- colier: zincat electrolitic
- temperature range -45 °C - +105 °C

Art.Nr.	Compus din	D (mm)	Model	F _{a,z} (N)	Amb. 1
I323303012	I320000012 + 33035081	12,0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303015	I320000015 + 33035081	15,0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303018	I320000018 + 33035087	17,2 - 18,0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303022	I320000022 + 33035095	21,3 - 22,0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303028	I320000028 + 33035103	27,0 - 28,0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303035	I320000035 + 33035103	33,7 - 35,0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303042	I320000042 + 33035112	42,4	BISOFIX [®] E32 + 2S Clamp	150	25
I323303048	I320000048 + 33035118	48,3	BISOFIX [®] E32 + 2S Clamp	225	25
I323303054	I320000054 + 33035127	54,0	BISOFIX [®] E32 + 2S Clamp	225	25
I323303060	I320000060 + 33035127	60,3	BISOFIX [®] E32 + 2S Clamp	350	25
I323303064	I320000064 + 33035153	64,0	BISOFIX [®] E32 + 2S Clamp	350	15
I323303070	I320000070 + 33035153	70,0	BISOFIX [®] E32 + 2S Clamp	425	15
I323303076	I320000076 + 33035162	76,1	BISOFIX [®] E32 + 2S Clamp	575	15
I323303089	I320000089 + 33035183	88,9	BISOFIX [®] E32 + 2S Clamp	875	5
I323303102	I320000102 + 33035194	102,0	BISOFIX [®] E32 + 2S Clamp	1.000	5
I323303108	I320000108 + 33035194	108,0	BISOFIX [®] E32 + 2S Clamp	1.075	5
I323303114	I320000114 + 33035205	114,0	BISOFIX [®] E32 + 2S Clamp	1.250	5
I323303133	I320000133 + 33035225	133,0	BISOFIX [®] E32 + 2S Clamp	1.475	5
I323303140	I320000140 + 33035225	140,0	BISOFIX [®] E32 + 2S Clamp	1.700	5