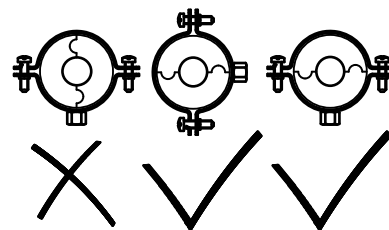
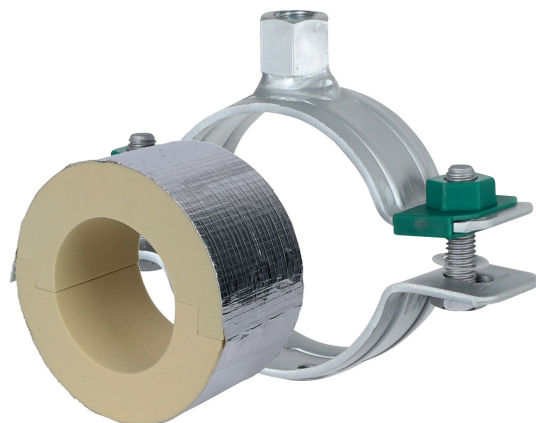


BISOFIX® PIR20 + HD500

12,0 - 273,1 mm

(D 03 56)



**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
- tehnologie BIS UltraProtect® 1000
- un singur sistem pentru aplicații interioare și exterioare
- rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
- temperature range -45 °C - +105 °C

BISOFIX® PIR20 + HD500

12,0 - 273,1 mm

(D 03 56)

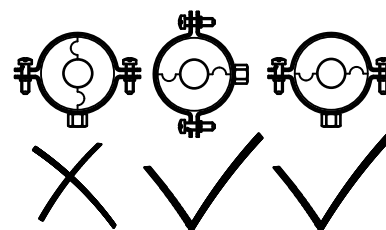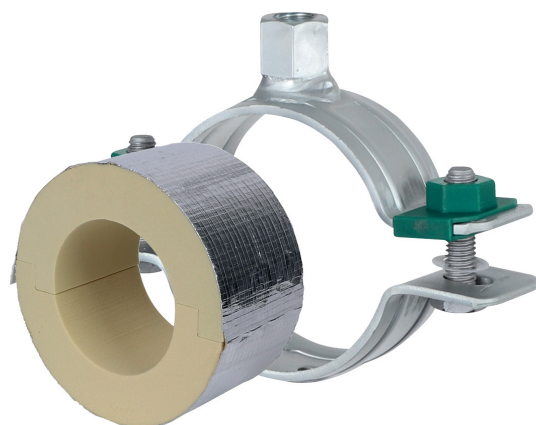

I203304076	I200000076 + 33048116	76,1	Clamp BISOFIX® PIR20 + HD500	390	25
I203304089	I200000089 + 33048133	88,9	Clamp BISOFIX® PIR20 + HD500	430	25
I203304102	I200000102 + 33048140	101,6	Clamp BISOFIX® PIR20 + HD500	450	25
I203304108	I200000108 + 33048154	108,0	Clamp BISOFIX® PIR20 + HD500	500	15
I203304114	I200000114 + 33048154	114,3	Clamp BISOFIX® PIR20 + HD500	1.110	15
I203304133	I200000133 + 33048183	133,0	Clamp BISOFIX® PIR20 + HD500	1.360	5
I203304140	I200000140 + 33048183	139,7	Clamp BISOFIX® PIR20 + HD500	1.410	5
I203304160	I200000160 + 33048202	159,0 - 160,0	Clamp BISOFIX® PIR20 + HD500	1.520	5
I203304168	I200000169 + 33048219	168,3	Clamp BISOFIX® PIR20 + HD500	1.570	5
I203304219	I200000219 + 33068264	219,1	Clamp BISOFIX® PIR20 + HD500	1.620	2
I203304273	I200000273 + 33068325	273,1	Clamp BISOFIX® PIR20 + HD500	1.670	2