


BISOFIX® PIR40

12,0 - 406,4 mm

(D 03 70)

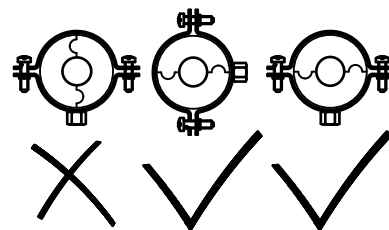

Caracteristici și beneficii

- for combination with rigid foam insulation
- cover joints with aluminium tape
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <108mm = 80kg/m³
- PIR density >108mm = 120kg/m³
- PIR density 80kg/m³ => 0,027 [W/m*K]
- PIR density 120kg/m³ => 0,040 [W/m*K]
- temperature range -45 °C - +105 °C

Art.Nr.	D (mm)	L	H (mm)	s (mm)	F _{a,z} (N)	Amb. 1
I400000012	12,0	75 mm	92,0	40,0	300	25
I400000015	15,0 - 16,0	75 mm	95,0	40,0	320	25
I400000018	17,2 - 18,0	75 mm	98,0	40,0	340	25
I400000022	21,3 - 22,0	75 mm	102,0	40,0	350	25
I400000028	26,9 - 28,0	75 mm	108,0	40,0	350	25
I400000034	33,7 - 35,0	75 mm	115,0	40,0	370	25
I400000042	42,4	75 mm	122,4	40,0	410	25
I400000048	48,3	75 mm	128,3	40,0	430	25
I400000054	54,0	75 mm	134,0	40,0	440	25
I400000057	56,0 - 57,0	75 mm	137,0	40,0	460	25
I400000060	60,3	75 mm	140,3	40,0	470	25
I400000064	64,0	75 mm	144,0	40,0	490	25
I400000070	70,0	75 mm	150,0	40,0	510	15
I400000076	76,1	75 mm	156,1	40,0	530	15
I400000089	88,9	75 mm	168,9	40,0	620	15
I400000102	101,6	100 mm	181,6	40,0	650	15
I400000108	108,0	100 mm	188,0	40,0	690	15
I400000114	114,3	100 mm	194,3	40,0	1.530	5
I400000133	133,0	100 mm	213,0	40,0	1.670	5
I400000140	139,7	100 mm	219,7	40,0	1.730	5
I400000160	159,0 - 160,0	100 mm	240,0	40,0	2.850	8
I400000168	168,3	100 mm	248,3	40,0	2.960	8
I400000219	219,1	150 mm	299,1	40,0	4.510	2
I400000273	273,1	150 mm	353,0	40,0	5.320	2
I400000324	323,9	150 mm	404,0	40,0	6.090	2
I400000406	406,4	150 mm	486,4	40,0	6.150	2

În combinație cu

Bifix® G2 (M8/10) (BUP1000)
 Colier 2S (M8/10)
 BIS Colier de sarcină HD500 (BUP1000)

În combinație cu

BIS Colier de sarcină HD500 (BUP1000)