
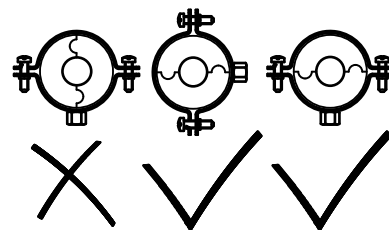


BISOFIX® PIR50 + 2S

12,0 - 114,3 mm

(D 03 82)

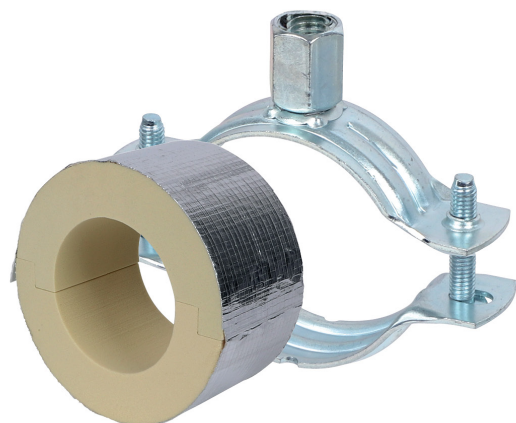

Caracteristici și beneficii

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80kg/m³ = 80kg/m³
- PIR density >80kg/m³ = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- colier: zincat electrolitic
- temperature range -45 °C - +105 °C

Art.Nr.	Compus din	D (mm)	Model	F _{a,z} (N)	Amb. 1
I503303012	I500000012 + 33035112	12,0	BISOFIX® PIR50 + 2S Clamp	220	25
I503303015	I500000015 + 33035118	15,0 - 16,0	BISOFIX® PIR50 + 2S Clamp	250	15
I503303018	I500000018 + 33035118	17,2 - 18,0	BISOFIX® PIR50 + 2S Clamp	300	15
I503303028	I500000028 + 33035137	26,9 - 28,0	BISOFIX® PIR50 + 2S Clamp	350	25
I503303034	I500000034 + 33035137	33,7 - 35,0	BISOFIX® PIR50 + 2S Clamp	370	25
I503303042	I500000042 + 33035144	42,4	BISOFIX® PIR50 + 2S Clamp	470	25
I503303048	I500000048 + 33035153	48,3	BISOFIX® PIR50 + 2S Clamp	500	15
I503303054	I500000054 + 33035162	54,0	BISOFIX® PIR50 + 2S Clamp	520	15
I503303057	I500000057 + 33035162	56,0 - 57,0	BISOFIX® PIR50 + 2S Clamp	520	15
I503303060	I500000060 + 33035162	60,3	BISOFIX® PIR50 + 2S Clamp	540	15
I503303064	I500000064 + 33035172	64,0	BISOFIX® PIR50 + 2S Clamp	550	15
I503303070	I500000070 + 33035172	70,0	BISOFIX® PIR50 + 2S Clamp	600	15
I503303076	I500000076 + 33035183	76,1	BISOFIX® PIR50 + 2S Clamp	650	15
I503303089	I500000089 + 33035194	88,9	BISOFIX® PIR50 + 2S Clamp	690	15
I503303102	I500000102 + 33035205	101,6	BISOFIX® PIR50 + 2S Clamp	720	15
I503303108	I500000108 + 33035216	108,0	BISOFIX® PIR50 + 2S Clamp	760	15
I503303114	I500000114 + 33035216	114,3	BISOFIX® PIR50 + 2S Clamp	1.680	15