


BISOFIX® PIR50 + HD500

12,0 - 406,4 mm

(D 03 86)

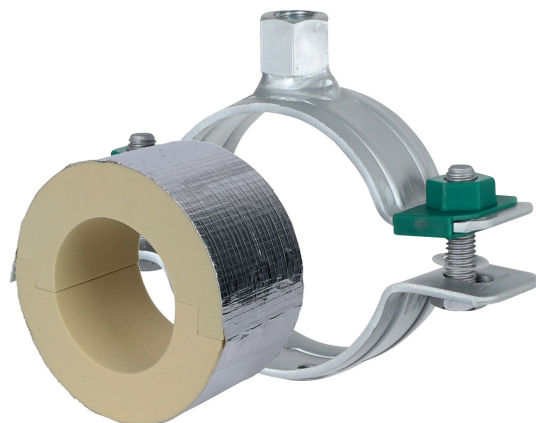



Caracteristici și beneficii

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
- tehnologie BIS UltraProtect® 1000
- un singur sistem pentru aplicații interioare și exterioare
- rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
- temperature range -45 °C - +105 °C

BISOFIX® PIR50 + HD500

(D 03 86)

12,0 - 406,4 mm

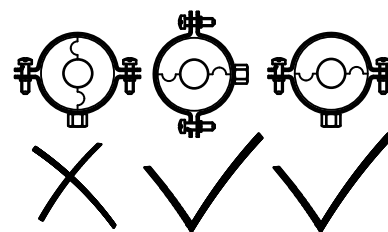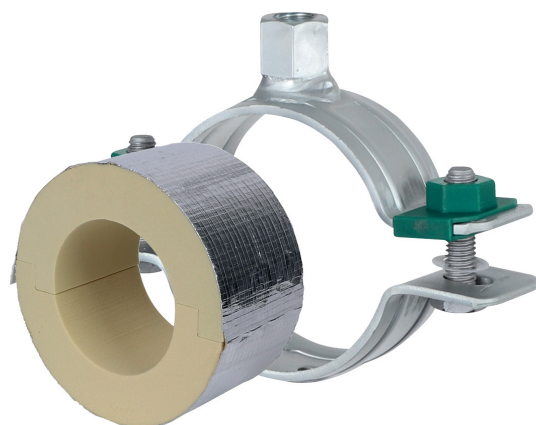

I503304076	I500000076 + 33048183	76,1	Clamp BISOFIX® PIR50 + HD500	650	15
I503304089	I500000089 + 33048183	88,9	Clamp BISOFIX® PIR50 + HD500	690	15
I503304102	I500000102 + 33048202	101,6	Clamp BISOFIX® PIR50 + HD500	720	5
I503304108	I500000108 + 33048219	108,0	Clamp BISOFIX® PIR50 + HD500	760	5
I503304114	I500000114 + 33048219	114,3	Clamp BISOFIX® PIR50 + HD500	1.680	5
I503304133	I500000133 + 33068241	133,0	Clamp BISOFIX® PIR50 + HD500	2.780	2
I503304140	I500000140 + 33068241	139,7	Clamp BISOFIX® PIR50 + HD500	2.860	2
I503304160	I500000160 + 33068264	159,0 - 160,0	Clamp BISOFIX® PIR50 + HD500	3.090	2
I503304168	I500000168 + 33068279	168,3	Clamp BISOFIX® PIR50 + HD500	3.200	2
I503304219	I500000219 + 33068325	219,1	Clamp BISOFIX® PIR50 + HD500	4.810	2
I503304273	I500000273 + 33068374	273,1	Clamp BISOFIX® PIR50 + HD500	5.620	2
I503304324	I500000324 + 33068436	323,9	Clamp BISOFIX® PIR50 + HD500	6.390	2
I503304406	I500000406 + 33068509	406,4	Clamp BISOFIX® E13 + HD500	6.410	2