



RapidStrut® Rail

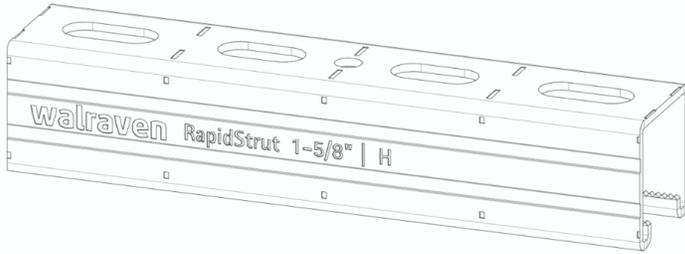

Product Specifications:

- Used for quick and easy installation
- Designed with continuous perforation
- Distance between rail end and first hole is always equal
- Continuous graduated 2 inch scale on both sides
- Material: Steel ASTM A 653
- Surface treatment: Hot-dip coated steel, Pre-galvanized



Item Number	Strut size (inches)	Length (feet)	Items per bundle
CR6505324	1-5/8 x 13/16 x 16g	10	10
CR6505322	1-5/8 x 13/16 x 14g	10	10
CR6505325	1-5/8 x 13/16 x 12g	10	10
CR6505342	1-5/8 x 1-5/8 x 14g	10	10
CR6505345	1-5/8 x 1-5/8 x 12g	10	10
CR6505365	1-5/8 x 2-7/16 x 12g	10	10
CR6505385	1-5/8 x 3-1/4 x 12g	10	10
CR6505642	1-5/8 x 1-5/8 x 14g	20	10
CR6505645	1-5/8 x 1-5/8 x 12g	20	10
CR6505665	1-5/8 x 2-7/16 x 12g	20	10
CR6505685	1-5/8 x 3-1/4 x 12g	20	10

PRODUCT SUBMITTAL		Architect / Owner:
Job Name:		
		Contractor:
Date:		
Part No.	Qty:	Notes:

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC.

