

## Walraven Перехідники різьбові (М/Ф)

(K 55 35)

регулювання різьбового з'єднання



6473XXX








6473521  
6484321

### Особливості та переваги

- only tension loads recommended
- для збільшення чи зменшення різьби хомутів і ін.
- матеріал: сталь
- оцинковка: електролітична

| Арт. №  | H<br>(мм) | h<br>(мм) | G1   | G2   | Lm1<br>(мм) | Lm2<br>(мм) | SW1<br>(мм) | F <sub>a,z</sub><br>(N) | Уп.min | Уп.max |
|---------|-----------|-----------|------|------|-------------|-------------|-------------|-------------------------|--------|--------|
| 6473008 | 19        | 12        | M8   | M6   | 7,0         | 5,5         | 13          | 2 500                   | 100    | 1 000  |
| 6473206 | 20        | 12        | M6   | M8   | 7,0         | 6,0         | 13          | 4 800                   | 100    | 1 000  |
| 6473210 | 23        | 15        | M10  | M8   | 9,0         | 6,0         | 13          | 4 800                   | 100    | 1 000  |
| 6473212 | 23        | 15        | M12  | M8   | 8,0         | 6,0         | 17          | 4 800                   | 50     | 500    |
| 6473221 | 30        | 22        | G1/2 | M8   | 13,0        | 8,0         | 27          | 4 800                   | 50     | 250    |
| 6473308 | 21        | 13        | M8   | M10  | 7,0         | 6,0         | 13          | 5 900                   | 100    | 1 000  |
| 6473312 | 25        | 15        | M12  | M10  | 8,0         | 8,0         | 17          | 5 900                   | 50     | 500    |
| 6473316 | 32        | 22        | M16  | M10  | 13,0        | 8,0         | 24          | 5 900                   | 25     | 250    |
| 6473321 | 31        | 21        | G1/2 | M10  | 12,0        | 8,0         | 27          | 5 900                   | 25     | 250    |
| 6473408 | 23        | 13        | M8   | M12  | 7,0         | 7,5         | 13          | 8 800                   | 50     | 1 000  |
| 6473410 | 23        | 13        | M10  | M12  | 8,0         | 7,5         | 13          | 8 800                   | 50     | 1 000  |
| 6473416 | 32        | 22        | M16  | M12  | 11,0        | 8,0         | 24          | 8 800                   | 50     | 250    |
| 6473510 | 32        | 18        | M10  | M16  | 9,0         | 11,0        | 19          | 10 800                  | 50     | 250    |
| 6473512 | 32        | 18        | M12  | M16  | 10,0        | 11,0        | 19          | 19 900                  | 50     | 250    |
| 6473421 | 26        | 11        | M10  | G1/2 | 9,0         | 13,0        | 27          | 10 800                  | 25     | 125    |
| 6473521 | 15        | -         | M16  | G1/2 | 15,0        | -           | -           | 19 900                  | 100    | 1 000  |
| 6473621 | 25        | 15        | G3/4 | G1/2 | 12,0        | 7,0         | -           | 12 700                  | 25     | 250    |
| 6473721 | 32        | 20        | G1   | G1/2 | 17,0        | 9,0         | -           | 5 500                   | 10     | 100    |

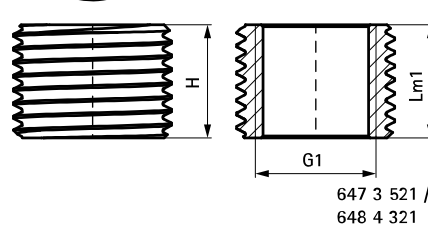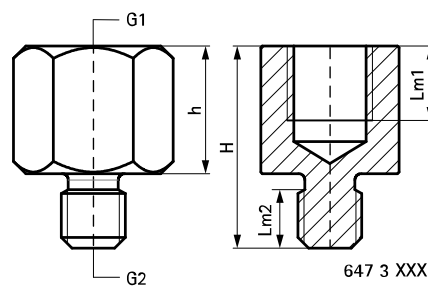

647 3 521 /  
648 4 321