


W5000 Cushion Clamp




NOISE REDUCING



Tested in accordance with
ISO 3822-1



Clamp has
removable
spacers.



Use spacers
for sliding
applications.




Remove spacers
for anchored
applications.

Product Specifications:

- For use with plastic pipes
- Spacers allow for pipe expansion and contraction
- Removable spacers make clamp suitable for either sliding or fixed points
- Patented one piece design means no loose parts
- Easier, faster, safer - installs with one hand
- 3 way screw head: Phillips, flat and hex
- Unique design allows one clamp to fit multiple pipe sizes - meaning less items to stock
- Noise and vibration reducing lining according to DIN EN ISO 3822-1
- Green EPDM rubber lining will prevent plasticiser migration
- W Series Clamps are boxed for easy handling - no more bags
- Surface is treated with high grade Zn-Mg based coating (withstands a salt spray corrosion test of at least 600 hours)
- Test Reports: Strength, Fire and Smoke: UL 1565 Listed, Plasticizer migration behavior: 2016-TR151002-V5, Noise emission: 2016-SG-Bauakustik-1647-001-16
- Materials: pre-galvanized steel 1.0242, noise insulation lining: EPDM rubber

Item Number	D (mm)	D / CTS (inches)	D / IPS (inches)	B (inches)	b (inches)	H (inches)	h (inches)	W (inches)	S (inches)	Fa,z (lbs)	Items per pkg
2055007	12-13	3/8	-	0.85	1.32	2.16	1.50	1.81	1/4	200	50
2055008	14-15	-	1/4	0.85	1.32	2.16	1.50	1.81	1/4	200	50
2055009	15-16	1/2	-	0.85	1.32	2.32	1.65	1.81	1/4	200	50
2055010	17-18	-	3/8	0.85	1.32	2.32	1.65	1.81	1/4	220	50
2055012	19-22	5/8-3/4	1/2	0.85	1.32	2.44	1.77	1.81	1/4	220	50
2055013	24-25	-	-	0.85	1.32	2.71	2.09	1.81	1/4	400	50
2055014	26-29	1	3/4	0.85	1.32	2.71	2.09	1.81	1/4	400	50
2055016	32-35	1-1/4	1	0.79	1.32	2.91	2.28	1.81	1/4	400	50
2055020	40-43	1-1/2	1-1/4	0.79	1.32	3.19	2.56	1.81	5/16	400	25
2055022	47-49	-	1-1/2	0.75	1.32	3.50	2.87	1.81	5/16	400	25
2055023	50-52	-	-	0.79	1.32	3.70	3.07	1.81	5/16	400	25
2055024	53-54	2	-	0.79	1.32	3.70	3.07	1.81	5/16	400	25
2055025	56-58	-	-	0.75	1.32	4.05	3.46	1.81	5/16	400	25
2055026	60-63	-	2	0.75	1.32	4.05	3.46	1.81	5/16	400	25

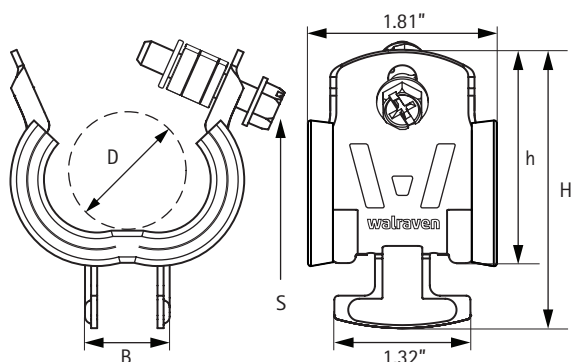

PRODUCT SUBMITTAL

Date: _____

Job Name: _____

Part No. _____

Qty: _____

Architect / Owner: _____

Contractor: _____

Notes: _____

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC.

walraven

Walraven, Inc.

500 Cane Creek Pkwy | Ringgold (Danville), VA 24586 (US) | Toll free (800) 610 5056 | Phone (434) 326 1484 | info.us@walraven.com | walraven.com/us