


BIS Strut Stainless Steel T-shape Base Plate


(M 53 10)

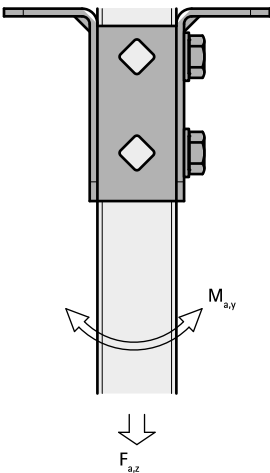

Features and Benefits

- highly flexible base plate for Strut rails
- open side of the rail can be turned to all sides
- extra safety by reinforced bending
- hole pattern is adapted to the hole pattern of Strut rails
- material: stainless steel 1.4404 (A4) - EN 10088, AISI 316L

Part No.	L	B	H	h	s	d1	S	k	k1	F _{a,z}	F _{a,z 2}	M _{a,y}	Pack 1
66587361	138 mm	45 (mm)	100 (mm)	91 (mm)	4.0 (mm)	18 x 12 (mm)	42 (mm)	95 (mm)	50 (mm)	3,636 (N)	3,636 (N)	164.0 (Nm)	10
<i>F_{a,z}</i> : max. allowed load in combination with 2 slide nuts M10, tightened with 40 Nm.													
<i>F_{a,z 2}</i> : max. allowed load in combination with 2 throughbolts M10, tightened with 40 Nm.													
<i>M_{a,y}</i> : max. moment in combination with 2 throughbolts M10, tightened with 40 Nm.													

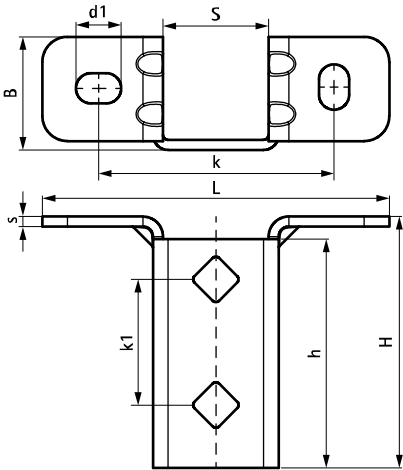

Complementary

Walraven RapidStrut® Stainless Steel Channel
Walraven RapidStrut® Stainless Steel Channel Double
WTR1 Throughbolt Anchor SSSt

Complementary

WD11 Drop-in Anchor SSSt
Walraven RapidStrut® Stainless Steel Slide Nut with Tabs