


BISMAT[®] SL Guidance Clamp

for stand pipes DN 70 - DN 200

M10

(A 30 20)

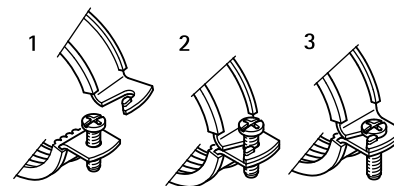

Features and Benefits

- two-screw clamp
- with quick locking system
- the inside diameter of the clamp is designed for noise isolating plastic pipes (e.g. Friaphon[®], As[®], Raupiano[®]) and cast iron drain pipes
- suitable for plastic pipe
- spacer washers between the flanges guarantee a limited grip to protect the rubber from crushing
- material: steel
- zinc plated
- noise insulating lining, EPDM rubber, black
- lining with unique noise insulating profile at the outside edges
- age resistant lining
- sound insulating lining according DIN 4109

Part No.	D (mm)	DN	Type	G	B (mm)	H (mm)	h (mm)	b x s (mm)	Pack 1
3408050	50	50	KA	M10	124	96	58	25 x 3.0	10
3408070	78	70	GA	M10	154	133	75	25 x 3.0	10
3408075	75	70	KA	M10	149	129	74	25 x 3.0	10
3408090	90	80	KA	M10	164	143	81	25 x 3.0	10
3408100	110	100	KA / GA	M10	184	164	91	25 x 3.0	10
3408125	125	125	KA	M10	199	179	99	25 x 3.0	10
3408137	135	125	GA	M10	211	190	104	25 x 3.0	10
3408150	160	150	KA / GA	M10	234	214	116	25 x 3.0	10

KA = Plastic drain pipe, GA = cast iron drain pipe

