


# Pacifyre® AWM II+ Fire Collar

(U 04 30)


for sealing of insulated or non-insulated flammable pipes and multi-layer pipes 32 – 400 mm

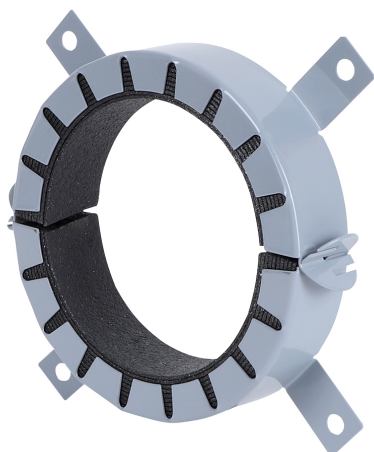

## Features and Benefits

- built-up fire collar for plastic (combustible) pipes and pipe systems. For apertures in walls (solid walls or light partition walls) and ceilings with fire protection
- the installation of elbows, pipe couplings or branch pipes into the wall or directly in, or under the ceiling is possible due to the superficial height of the sleeve
- angular insertion is possible
- installation of telecommunications pipeline- or protective piping with up to 2 cables is possible
- suitable for damp conditions
- should be fitted to both sides of a wall and on one side below a ceiling
- flexible annular gap seal
- the use of PE noise insulation hose up to a thickness of 4 mm of composite natural rubber insulation to a thickness of 43 mm is allowed
- zero distance is possible between fire collars
- in approval with the German Institute for civil engineering (DIBt) in accordance with Z 19.53-2331 and monitored by the MPA Braunschweig, Germany
- European approval: ETA-24/0840

| Part No.   | D<br>(mm) | d<br>(mm) | Model          | B<br>(mm) | H<br>(mm) | Pack 1 |
|------------|-----------|-----------|----------------|-----------|-----------|--------|
| 2134032034 | 32        | 36        | 2 fixing tabs  | 50        | 26        | 10     |
| 2134040042 | 40        | 44        | 2 fixing tabs  | 58        | 26        | 10     |
| 2134050052 | 50        | 54        | 2 fixing tabs  | 68        | 26        | 10     |
| 2134063065 | 63        | 67        | 4 fixing tabs  | 94        | 26        | 10     |
| 2134075077 | 75        | 79        | 4 fixing tabs  | 106       | 26        | 10     |
| 2134090092 | 90        | 94        | 4 fixing tabs  | 132       | 26        | 10     |
| 2134110112 | 110       | 114       | 4 fixing tabs  | 155       | 26        | 10     |
| 2134125125 | 125       | 129       | 4 fixing tabs  | 172       | 40        | 2      |
| 2134140140 | 140       | 144       | 4 fixing tabs  | 200       | 40        | 2      |
| 2134160160 | 160       | 164       | 4 fixing tabs  | 220       | 40        | 2      |
| 2134180180 | 180       | 184       | 8 fixing tabs  | 264       | 40        | 2      |
| 2134200200 | 200       | 204       | 8 fixing tabs  | 284       | 40        | 2      |
| 2134225225 | 225       | 239       | 10 fixing tabs | 328       | 50        | 1      |
| 2134250250 | 250       | 264       | 10 fixing tabs | 353       | 50        | 1      |
| 2134280280 | 280       | 289       | 12 fixing tabs | 378       | 50        | 1      |
| 2134300300 | 300       | 314       | 12 fixing tabs | 403       | 50        | 1      |
| 2134315315 | 315       | 328       | 12 fixing tabs | 417       | 50        | 1      |
| 2134355355 | 355       | 364       | 12 fixing tabs | 453       | 50        | 1      |
| 2134400400 | 400       | 414       | 12 fixing tabs | 503       | 50        | 1      |

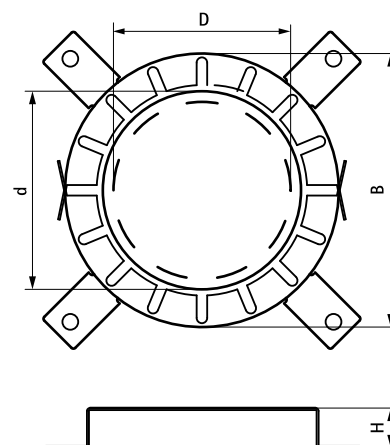

## Complementary

Pacifyre® FPM  
Pacifyre® ID-Card