

Walraven Strut Skenfäste

för montage på skena eller vägg


(H 12 50)



6658 3 801




6658 3 802



Funktioner och Fördelar

- snabb installation
- ideal for fastening RapidStrut® Fixing Rails as traverses in shafts or racks
- suitable for rails type 21, 41 or 21 Double
- with pre-assembled screws M10x16mm / SW17 and washers 10,5x40mm
- blankförzinkad

■ material: stål 1.0332

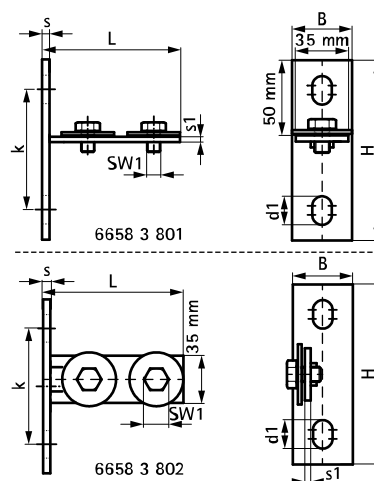

Art.nr.	RSK nr	Modell	L	B (mm)	H (mm)	s (mm)	s1 (mm)	d1 (mm)	k (mm)	T _(inst.) (Nm)	F _{a,y} (N)	F _{a,y2} (N)	F _{a,x} (N)	F _{a,x 2} (N)	fp
66583801		Horisontal	104 mm	40	120	5,0	4,0	19 x 13	80	15,0	4 280*	9 880**	1 760*	1 980**	25
66583802	3820637	Vertikal	104 mm	40	120	5,0	4,0	19 x 13	80	15,0	4 280*	9 880**	1 760*	1 980**	25

* F_{a,y} and F_{a,x} fixed on rail type L (1,5mm thickness) with M12 and 25Nm.

** F_{a,y2} and F_{a,x2} fixed on rail type H (2,5mm thickness) with M12 and 35Nm.